




SIRUI Dragon Series Bendable RGB LED Light

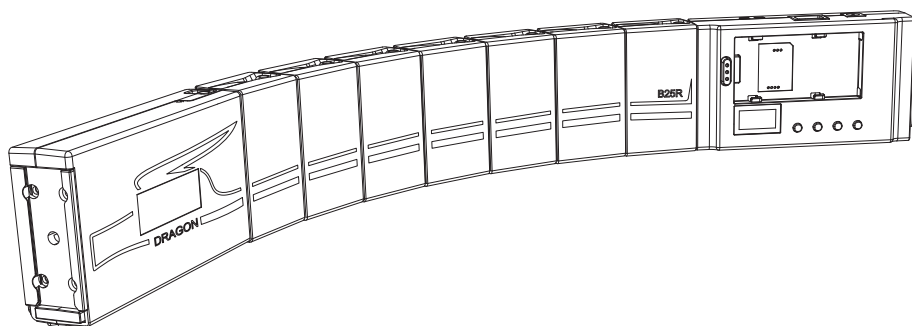

B25R Product Manual


Foreword

This RGB LED Light B25R is a bendable continuous light that is capable of illuminating subjects from different angles, allowing you to create with more freedom. Powered by AC/DC adapters and batteries, the B25R is easy to operate and can be used in a variety of scenarios, such as product shooting, video shooting, portrait shooting, etc.


Features

1. Bendable structure for illumination from different angles
2. Quick combination of multiple lights
3. High intensity and high CRI/TLCI metrics contribute to more vivid images
4. Connect and set up the lights flexibly to achieve creative shooting
5. Powered by adapters and batteries for indoor and outdoor use

What's in the Box

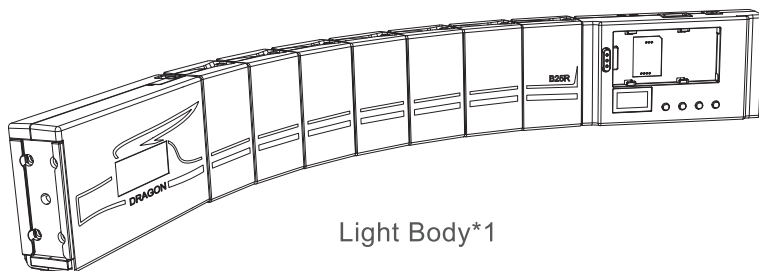


Light Body*1



Adapter*1

Product Details

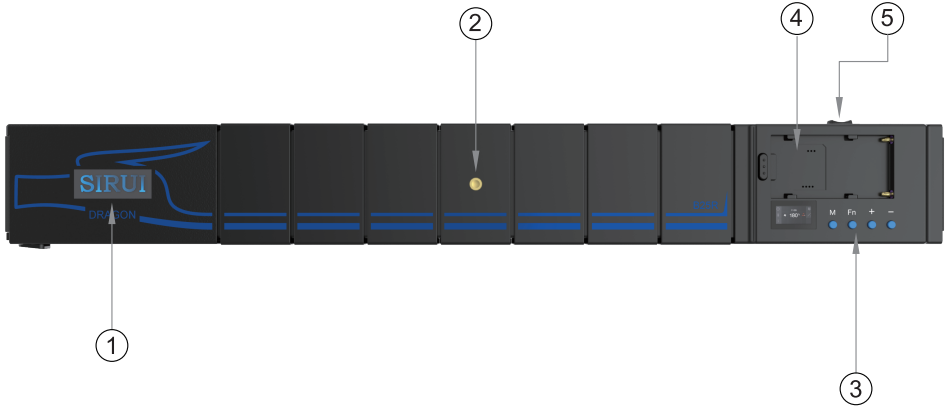

1	Luminous Logo
2	1/4" Screw Port
3	Buttons
4	Battery Compartment
5	Power Switch

Power Management

1. Adapter Power Supply

Input: 100-240V~50/60Hz 2A

output: 9V, 4A

2. External Battery Power Supply

Load a NP-F970 battery into the battery compartment. (The adapter cannot be used to charge the battery)

Operation

1. Power On/Off

When powered by the adapter, press the switch to the left (I) to turn on the light and return the switch to the middle to turn off the light.

When powered by batteries, press the switch to the right (II) to turn on the light and return the switch to the middle to turn off the light.




2. Mode Selection

Hit the M button to choose from the CCT mode, HSI mode, RGB mode, and FX mode.

When in CCT/HSI/RGB mode, press and hold the FN button to enter the light preset mode.

2.1 CCT Mode

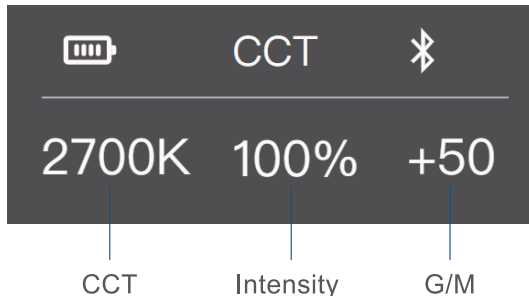


2.1.1 CCT adjustment: Hit the FN button to select the CCT. Press the +/- button to adjust the CCT in at least 100K increments from 2700K to 8500K.

2.1.2 Intensity adjustment: Hit the FN button to select the Intensity. Press the +/- button to adjust the intensity in at least 1% increments from 0% to 100%.

2.1.3 G/M adjustment: Hit the FN button to select the G/M. The value is adjustable from -50 to +50.

2.2 FX Mode

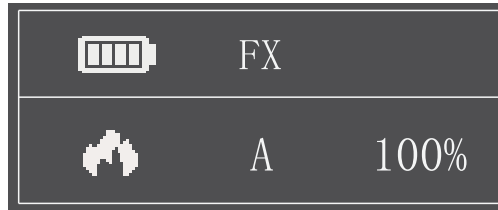

2.2.1 Hit the FN button to select the Effect/Speed/Intensity. Press the +/- button to adjust the settings.


2.2.2 Intensity adjustment: Press the +/- button to adjust the intensity in at least 1% increments from 0% to 100%.

2.2.3 There are 16 situational special effects for your choice:

No.	Display	Situation	DisplayA	DisplayB	DisplayC
1		RGB Cycle	Slow	Medium	Quick
2		Flash	Flash	Press Conference	Paparazzi
3		Disco	Birthday Party	KTV	Disco
4		Lightning	Discontinuous	Frequent	Sustainable
5		Broken Bulb	Discontinuous	Frequent	Sustainable
6		TV	Slow	Medium	Quick
7		Candle	Discontinuous	Frequent	Sustainable
8		Fire	Firewood	Campfire	Fire Hazard
9		Firework	Brief	Continuous	Show
10		Police Car	Strong Fash	Frequent Flash	Quick Flash
11		Fire Truck	Strong Fash	Frequent Flash	Quick Flash
12		Ambulance	Strong Fash	Frequent Flash	Quick Flash
13	SOS	SOS	Slow	Medium	Quick
14		Blast	Discontinuous	Frequent	Sustainable
15		Impulse	Slow	Medium	Quick
16		Welding	Discontinuous	Frequent	Sustainable


2.3 HSI Mode

Hit the FN button to select the Hue/Saturation/Intensity. Press the +/- button to adjust the settings. Hue is adjustable from 0° to 359°, saturation from 0 to 100, and intensity from 0% to 100%.

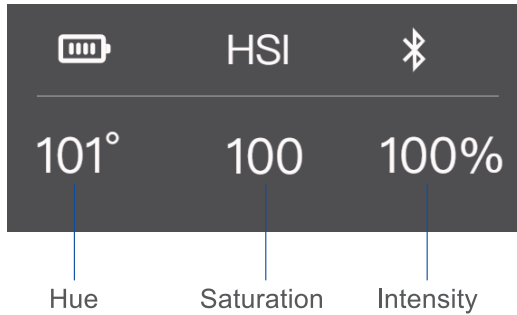

2.4 RGB Mode


Hit the FN button to select the R/G/B. Press the +/- button to adjust the values from 0 to 255.

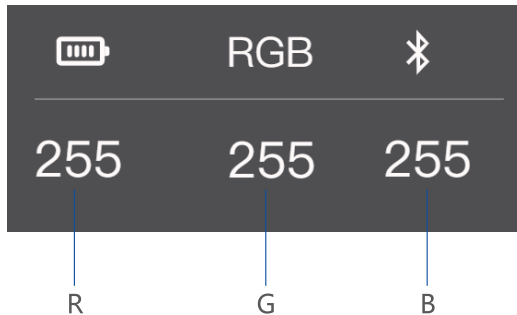

2.5 Light Preset Mode

2.5.1 When in CCT/HSI/RGB mode, press and hold the FN button to enter the light preset mode.

2.5.2 Press the M button to Read/Save the preset effect.

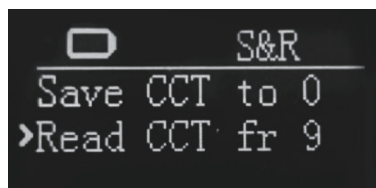

3. APP Control

- 3.1 Press and hold the M button to turn on Bluetooth. (Press and hold the M button again to turn off Bluetooth.)
- 3.2 Scan the QR code to download the "SIRUI Light" App.
- 3.3 Turn on Bluetooth on the phone and enter the "SIRUI Light" App. Select "B25R LED Light" from the device list.



Scan the QR code to download the App



* For detailed steps, please refer to the APP instruction manual.

4. Set Up the Light

- 4.1 Fix the B25R via the 1/4" screw hole on the back of the light.
- 4.2 Two lights can be mounted on a connector that comes with the two-light kit.
You can also combine several lights together via the quick-release structure at each end of the light.

Specifications	
Mode	B25R
Dimensions	583*75*32.3mm/22.95*2.95*1.27in
Weight	960g/2.12lbs
Adapter	9V 4A
Power Consumption	Max 25W
CCT	2700K~8500K
Special Effect	16
100% Illuminance (LUX)	0.5m 2000lux
TLCI	98
CRI	96
Ambient Temperature Operation	-10 C -45 C
Control Method	APP
Wireless Operating Range (Bluetooth)	15m

* Product design and specifications are subject to change without notice.

Cautions

1. The product should be kept in a cool, dry and ventilated place.
2. Do not look directly at the LED lamp beads when the light is on.
3. Do not put the light near flammable and volatile solvents.
4. Avoid using the light in humid, dusty, overheated environments.
5. Use of unauthorized power adapter may cause damage to the product and void the warranty.

Maintenance

- If there is something wrong with the light when it is working, please turn it off first.
- Avoid sudden impacts and the product should be dedusted regularly.
- It is normal that the light gets a bit hot when it is working.
- Maintenance must be performed by the authorized maintenance department which can provide original accessories.
- This product, except for consumables, supports a one-year warranty.
- Unauthorized service will void the warranty.
- If the product had failures or was wetted, do not use it until it is repaired by professionals.
- Changes made to the specifications or designs may not be reflected in this manual.

警告